



PolarTuff

ROOF RAKE


with Telescoping Handle

YEOMAN & COMPANY

PO Box 30, Monticello, Iowa 52310



www.yo-ho.com

- 1** Note that neck piece has a **larger** connecting pin on one end, and a **smaller** one on the other end.


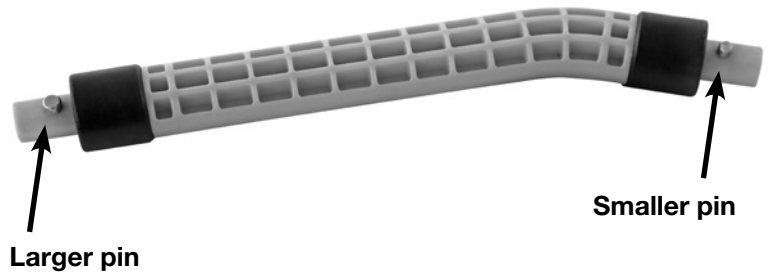


- 2** Insert the neck piece with the **larger** connecting pin into the **blade** receiving socket.


Turn the neck counterclockwise and pull back to lock in position.

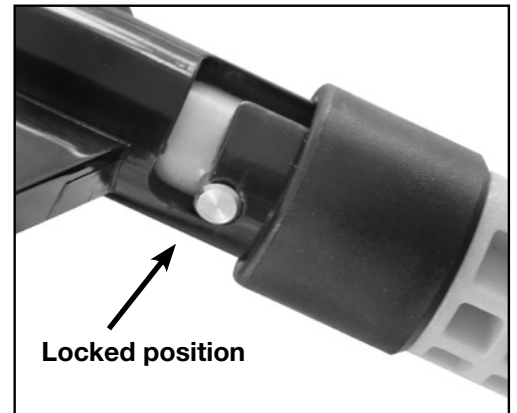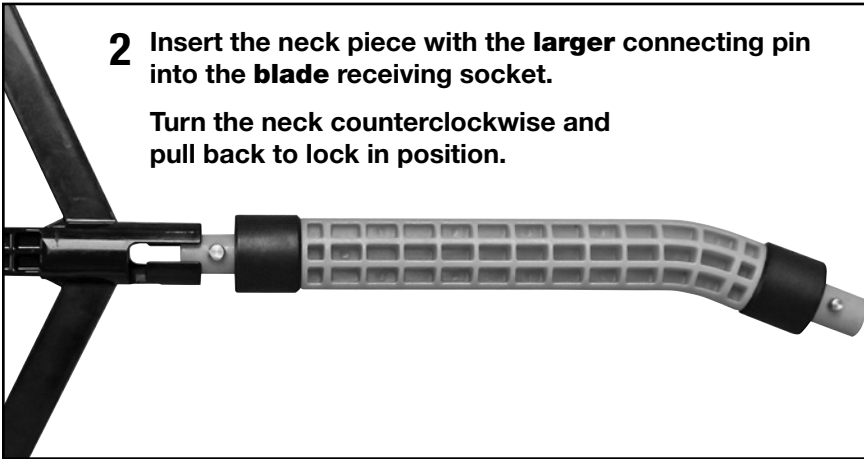

- 3** Insert the neck piece with the **smaller** connecting pin into the **handle** receiving socket. Turn the handle counterclockwise and pull back to lock in position.

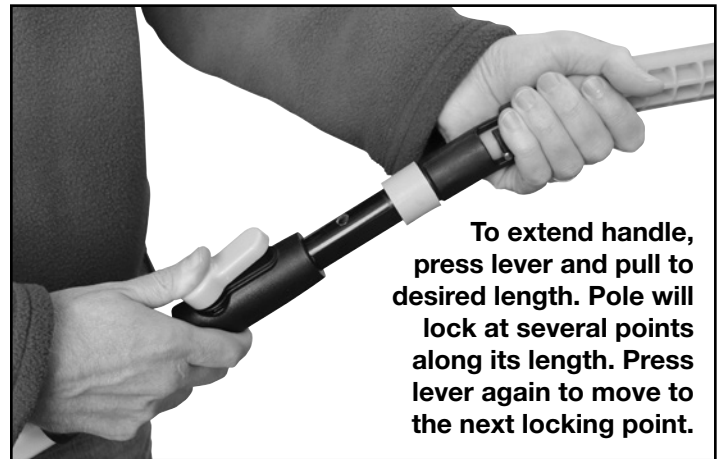

To extend handle, press lever and pull to desired length. Pole will lock at several points along its length. Press lever again to move to the next locking point.

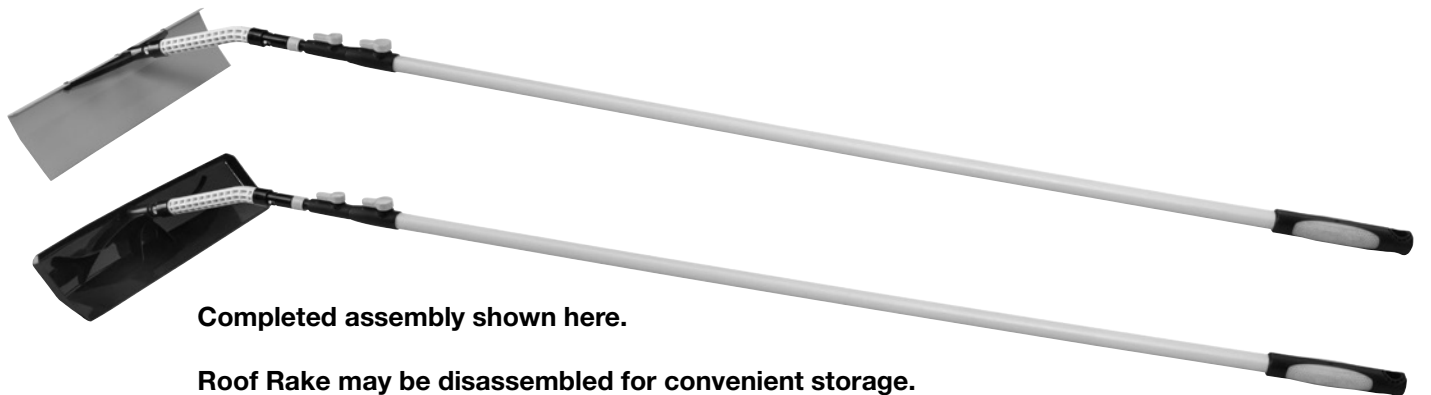

Completed assembly shown here.

Roof Rake may be disassembled for convenient storage.